

Aplicaciones-Applications Aplicações



Bisagra para carpinterías de cámara tradicional.
Hinges for traditional series carpentries (national serie).
Dobradiça para serie de Câmara Tradicional.

Características-Features -Caraterísticas

Incorpora un espárrago (opcional), que garantiza una total resistencia al deslizamiento. Es reversible.

A screw (DIN 914 M5x8) that assures a greater resistance for sliding is optional. This hinge is reversible.

Incorpora um parafuso (opcional), que garante a maxima resistencia ao deslizamento. É reversível.

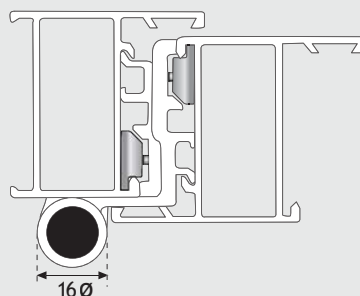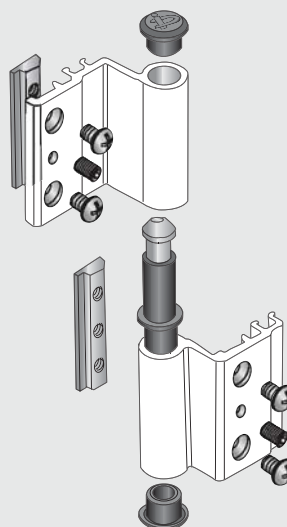

Cod. BI0090Z2T

2 tornillos-2 screws -2 parafusos

Cod. BI0090Z3T

3 tornillos-3 screws -3 parafusos

Cod. BI0090I2T / 3T

Bulón INOX, 2-3 tornillos-INOX spindle, 2-3 screws-eixo INOX,2-3 parafusos

Ref. Color-Colour code -Código de Cor

7 Blanco/White/ Branco

8 Negro/Black/ Preto

9 Otros RAL/others/otros

Acabados especiales en página 104

Other coatings see page 104

Outros lacagens ver página 104



Componentes-Components -Componentes

| | |
|--|-----------------------------------|
| semibisagras/semi-hinges/Semi-dobradiças | ALUMINIUM |
| tapones-casquillo/plugs-sheath/tampões-bocal | Low friction Polyamide |
| bulón/spindle/eixo | acero - steel-aço |
| 4 tornillos/screws/parafusos | INOX-stainless steel DIN 966 M5X8 |
| 2 placas/plates/placas | zamak |
| 2 espárragos/screws/parafusos | INOX-stainless steel DIN 914 M5X8 |

Pack 50 un. 190x105x240 cms. 6,4 Kgs.

Pack 100 un. 253x240x405 cms. 26,1 Kgs.